


NTXMSM60A182BA 5-TON MULTI-ZONE INVERTER HEAT-PUMP SYSTEM



Job Name:

System Reference:

Date:

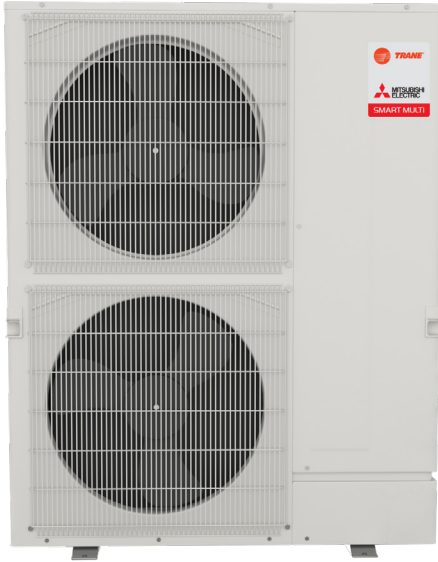

FEATURES

- Compatible with NV- and P-Series and CITY MULTI® indoor units. Branch box required for connection with NV- and P-Series
- Variable speed INVERTER-driven compressor
- Seacoast protection on heat exchanger and base panel (rated for 2,000 hrs in accordance with ASTM B117 testing)
- Thermal Differential 1°F (with TAC-MKA32/52BC only)
- Optional base pan heater
- Quiet outdoor unit operation, rated sound pressure as low as 58 dB(A)
- High pressure protection
- Compressor thermal protection
- Compressor overcurrent detection
- Fan motor overheating/voltage protection

ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Specifications are subject to change without notice.

© 2024 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

SPECIFICATIONS: NTXMSM60A182BA

Cooling¹ (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static) Mix (High-static) // Ducted (High-static))	Maximum Capacity	BTU/H	60,000 // 60,000 // 60,000 60,000 // 60,000
	Rated Capacity	BTU/H	60,000 // 60,000 // 60,000 60,000 // 60,000
	Minimum Capacity	BTU/H	25,600 // 25,600 // 25,600 25,300 // 25,000
	Maximum Power Input	W	4,515 // 5,088 // 5,660 5,143 // 5,770
	Rated Power Input	W	4,515 // 5,088 // 5,660 5,143 // 5,770
	Power Factor (208V, 230V)	%	98.9, 98.9 // 98.9, 98.9 // 98.9, 98.9 98.9, 98.9 // 98.9, 98.9
Heating at 47°F² (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static) Mix (High-static) // Ducted (High-static))	Maximum Capacity	BTU/H	66,000 // 66,000 // 66,000 66,000 // 66,000
	Rated Capacity	BTU/H	66,000 // 66,000 // 66,000 66,000 // 66,000
	Minimum Capacity	BTU/H	31,000 // 31,000 // 31,000 28,700 // 26,400
	Maximum Power Input	W	4,720 // 5,205 // 5,690 5,205 // 5,690
	Rated Power Input	W	4,720 // 5,205 // 5,690 5,205 // 5,690
	Power Factor (208V, 230V)	%	98.9, 98.9 // 98.9, 98.9 // 98.9, 98.9 98.9, 98.9 // 98.9, 98.9
Heating at 17°F³ (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static) Mix (High-static) // Ducted (High-static))	Maximum Capacity	BTU/H	65,000 // 65,000 // 65,000 65,000 // 65,000
	Rated Capacity	BTU/H	41,500 // 41,000 // 40,500 41,000 // 40,500
	Maximum Power Input	W	8,285 // 8,908 // 9,530 8,680 // 9,075
	Rated Power Input	W	4,195 // 4,473 // 4,750 4,473 // 4,750
Heating at 5°F⁴ (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static) Mix (High-static) // Ducted (High-static))	Maximum Capacity	BTU/H	46,500 // 46,500 // 46,500 46,500 // 46,500
	Maximum Power Input	W	6,815 // 7,195 // 7,575 7,195 // 7,575
Efficiency (Non-Ducted // Mix (Mid-static) // Ducted (Mid-static) Mix (High-static) // Ducted (High-static))	SEER2		20.0 // 18.5 // 17.0 17.75 // 15.5
	EER2¹		13.3 // 11.95 // 10.6 11.85 // 10.4
	HSPF2 (IV)		10.5 // 9.75 // 9.0 9.55 // 8.6
	COP at 47°F²		4.1 // 3.75 // 3.4 3.75 // 3.4
	COP at 17°F at Maximum Capacity³		2.3 // 2.15 // 2.0 2.2 // 2.1
	COP at 5°F at Maximum Capacity⁴		2.2 // 2.15 // 2.1 2.0 // 1.8
	ENERGY STAR® Certified		Yes // Yes // No No // No
Electrical	Electrical Power Requirements	Voltage, Phase, Frequency	208/230, 1, 60
	Guaranteed Voltage Range	V AC	187-253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	24
	Short-circuit Current Rating (SCCR)	kA	5
	Recommended Fuse/Breaker Size if Branch Box Powered by Outdoor Unit	A	50
	Recommended Fuse/Breaker Size without Branch Box or Branch Box Powered Separate	A	40
	Recommended Wire Size (Indoor - Outdoor) if Branch Box Powered by Outdoor Unit	AWG	6
	Recommended Wire Size (Indoor - Outdoor) without Branch Box or Branch Box Powered Separate	AWG	8
	MCA if Branch Box Powered by Outdoor Unit	A	55.0
	MOCP if Branch Box Powered by Outdoor Unit	A	90
	MCA without Branch Box or Branch Box Powered Separate	A	45
	MOCP without Branch Box or Branch Box Powered Separate	A	80
	Fan Motor Full Load Amperage	A	0.8+0.8

NOTES:

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)	¹ Cooling (Indoor // Outdoor) ³ Heating at 17°F (Indoor // Outdoor)	² Heating at 47°F (Indoor // Outdoor)	⁴
	°F 80 DB, 67 WB // 95 DB, 75 WB °F 70 DB, 60 WB // 17 DB, 15 WB	°F 70 DB, 60 WB // 47 DB, 43 WB	

Conditions	4Heating at 5°F (Indoor // Outdoor)	°F	70 DB, 60 WB // 5 DB, 4 WB
------------	-------------------------------------	----	----------------------------

*Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

*A when 1 or more PLA-A·EA7 connected

*B Branch box should be placed within the level between the outdoor unit and indoor units

°C 5°F DB - 115°F DB when optional wind baffles are installed

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

Mid and high external static pressure tests conducted at 0.3 and 0.5 in.w.g. respectively, according to AHRI 210/240. The external static pressures utilized have no bearing on the capabilities of the indoor unit; please refer to the indoor unit manual to select the correct external static pressure setting for the application.

SPECIFICATIONS: NTXMSM60A182BA

Outdoor unit	Airflow Rate (Cooling / Heating)	CFM	4,875 / 4,555
	Refrigerant Control		LEV
	Defrost Method		Reverse Cycle
	Heat Exchanger Type		Plate fin coil
	Heat Exchanger Coating		Blue Fin Coating
	Sound Pressure Level, Cooling ¹	dB(A)	58
	Sound Pressure Level, Heating ²	dB(A)	59
	Compressor Type		Hermetic
	Compressor Model		ANB52FYDMT
	Compressor Motor Output	kW	3.9
	Compressor Rated Load Amps	A	19
	Compressor Locked Rotor Amps	A	22.0
	Compressor Oil Type // Charge	oz.	FVC68D // 78
	Base Pan Heater		Optional (PAC-SJ20BH-E)
	Unit Dimensions	W: In. [mm]	41-11/32 [1,050]
		D: In. [mm]	13 [330]
		H: In. [mm]	52-11/16 [1,338]
	Package Dimensions	W: In. [mm]	43 [1,090]
		D: In. [mm]	18 [450]
		H: In. [mm]	57 [1,430]
	Unit Weight	Lbs.[kg]	302 [137]
	Package Weight	Lbs.[kg]	326 [148]
Outdoor unit operating temperature range	Cooling Intake Air Temp (Maximum / Minimum) ³	°FDB	115 / 5°C
	Cooling Thermal Lock-out / Re-start Temperatures	°FDB	N/A / N/A
	Heating Intake Air Temp (Maximum / Minimum)	°FDB	59 / -13
	Heating Thermal Lock-out / Re-start Temperatures	°FDB	-24 / -14
Refrigerant	Pre-Charged Refrigerant Amount	Lbs, oz	11.0, 4.0
Indoor unit connection	Maximum Number of Connected IDU with Branch Box		8 (6) ^{4A}
	Maximum Number of Connected IDU without Branch Box		12
	Minimum Connected Capacity with Branch Box		12,000
	Minimum Connected Capacity without Branch Box		30,000
	Maximum connected capacity		78,000
Piping	Liquid Pipe Size O.D. (Flared)	In.[mm]	3/8 [9.52]
	Gas Pipe Size O.D. (Flared)	In.[mm]	3/4 [19.05]
	Total Piping Length when using Branch Box	Ft. [m]	492 [150]
	Total Piping Length without Branch Box	Ft. [m]	492 [150]
	Maximum Height Difference ^B , ODU above IDU	Ft. [m]	164 [50]
	Maximum Height Difference ^B , ODU below IDU	Ft. [m]	131 [40]
	Maximum Height Difference ^B , between branch boxes	Ft. [m]	49 [15]
	Maximum Height Difference between IDU and IDU without branch box	Ft. [m]	49 [15]
		Ft. [m]	49 [15]
	Maximum Piping Length between ODU and Branch Box	Ft. [m]	180 [55]
	Farthest Piping Length from ODU to IDU with Branch Box	Ft. [m]	262 [80]
	Farthest Piping Length from ODU to IDU without Branch Box	Ft. [m]	262 [80]
	Farthest Piping Length after Branch Box	Ft. [m]	82 [25]
	Total Piping Length between Branch Boxes and IDU	Ft. [m]	311 [95]
	Maximum Number of Bends for IDU		15

NOTES:

AHRI Rated Conditions ¹Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB
(Rated data is determined at a fixed compressor speed) ²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB
³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

Conditions ⁴Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

¹Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

^A when 1 or more PLA-A-EA7 connected

^B Branch box should be placed within the level between the outdoor unit and indoor units

^C 5°F DB - 115°F DB when optional wind baffles are installed

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

Mid and high external static pressure tests conducted at 0.3 and 0.5 in.w.g. respectively, according to AHRI 210/240. The external static pressures utilized have no bearing on the capabilities of the indoor unit; please refer to the indoor unit manual to select the correct external static pressure setting for the application.

OUTDOOR UNIT ACCESSORIES: NTXMSM60A182BA

Branch Box	5 Port Branch Box	PAC-MKA53BC
Control/Service Tool	Maintenance Tool Interface	PAC-USCMS-MN-1
Drain Socket	Drain Socket	PAC-SG60DS-E
Wind Baffle	Front Wind Baffle	WB-PA3 (two pieces are required)
Branch Box	3 Port Branch Box	PAC-MKA33BC
Stand	Outdoor Unit Stand — 12" High	QSMS1202M
	24" Dual Fan Stand	QSMS2402M
	18" Dual Fan Stand	QSMS1802M
Control Wire	M-Net Control Wire, 1,000' Roll (16-AWG, Standard, Twisted Pair, Shielded, Jacketed- Plenum rated)	CW162S-1000
Stand	Condenser Wall Bracket	QSWB2000M-1
Control Wire	M-Net Control Wire, 250' Roll (16-AWG, Standard, Twisted Pair, Shielded, Jacketed- Plenum rated)	CW162S-250
Stand	Condenser Wall Bracket - Stainless Steel Finish	QSWBSS
Mini-Split Wire	14 Gauge, 4 wire MiniSplit Cable—50 ft. roll	S144-50
	14 Gauge, 4 wire MiniSplit Cable—250 ft. roll	S144-250
Branch Box	Branch Box Enclosure	BBE-1
Mini-Split Wire	16 Gauge, 4 wire MiniSplit Cable—250 ft. roll	S164-250
Ball Valve	Refrigeration Ball Valve - 1/2"	BV12FFSI2
Mounting Pad	Condensing Unit Mounting Pad: 24" x 42" x 3"	ULTRILITE2
Mini-Split Wire	16 Gauge, 4 wire MiniSplit Cable—50 ft. roll	S164-50
Distribution pipe	Brazed Connection	MSDD-50BR-E
Port Adaptor	Adaptor: 1/4" x 3/8"	PAC-493PI
Branch Box	3 Port Branch Box	TAC-MKA32BC
	5 Port Branch Box	TAC-MKA52BC
Air Outlet Guide	Air Outlet Guide (1 Piece)	PAC-SH96SG-E (two pieces are required)
Port Adaptor	Adaptor: 3/8" x 5/8"	PAC-SG76RJ-E
Optional Defrost Heater	Optional Defrost Heater	PAC-SJ20BH-E
Centralized Drain Pan	Central Drain Pan	PAC-SH97DP-E
Port Adaptor	Adaptor: 3/8" x 1/2"	MAC-A454JP-E
	Adaptor: 1/2" x 3/8"	MAC-A455JP-E
	Adaptor: 1/2" x 5/8"	MAC-A456JP-E
Distribution pipe	Flare Connection	MSDD-50AR-E
Air Deflector	Vertical Air Deflector	ADV-1
Ball Valve	Refrigeration Ball Valve - 1/4"	BV14FFSI2
Mini-Split Wire	14 Gauge, 4 wire MiniSplit Cable—250 ft. roll	SW144-250
Ball Valve	Refrigeration Ball Valve - 3/8"	BV38FFSI2
Mini-Split Wire	16 Gauge, 4 wire MiniSplit Cable—250 ft. roll	SW164-250
	14 Gauge, 4 wire MiniSplit Cable—50 ft. roll	SW144-50
	16 Gauge, 4 wire MiniSplit Cable—50 ft. roll	SW164-50
Ball Valve	Refrigeration Ball Valve - 5/8"	BV58FFSI2
Stand	Outdoor Unit 3-1/4 inch Mounting Base (Pair) - Plastic	DSD-400P
Hail Guards	Hail Guard	HG-A2

FORM# NTXMSM60A182BA - 202407

© 2024 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

AHRI CERTIFIED®
www.ahridirectory.org

Unitary Small HP
AHRI Standard 210/240

Certification applies only when the condenser system is listed with AHRI.

